

PULLING SWIVEL

ELIMINATE TANGLING AND WINDING
OF ROPE OR CABLE DURING ANY PULL

iTOOLco.



SW-114
6,000 lb.
1-1/4"



SW-158
10,000 lb.
1-5/8"



SW-200
20,000 lb.
2"



Protects pulling eye



Easy installation



Quick install between
pulling eye and pulling swivel


Take the guesswork out of connecting pulling eyes and rope using iTOOLco's Pulling Swivels. Quality tested to ensure optimum performance and reliability, iTOOLco Pulling Swivels combine a high safe working load with a compact, heavy-duty design. By uniformly distributing the load, iTOOLco Pulling Swivels reduce wear on the rope pulling eye. Two pins provide a quick and secure connection between the rope and wire. Cable and rope swivel independently, reducing tangling of rope and cable during pulls. iTOOLco Pulling Swivels are available in three convenient sizes.



PULLING SWIVEL

ELIMINATE TANGLING AND WINDING
OF ROPE OR CABLE DURING ANY PULL

iTOOLco.

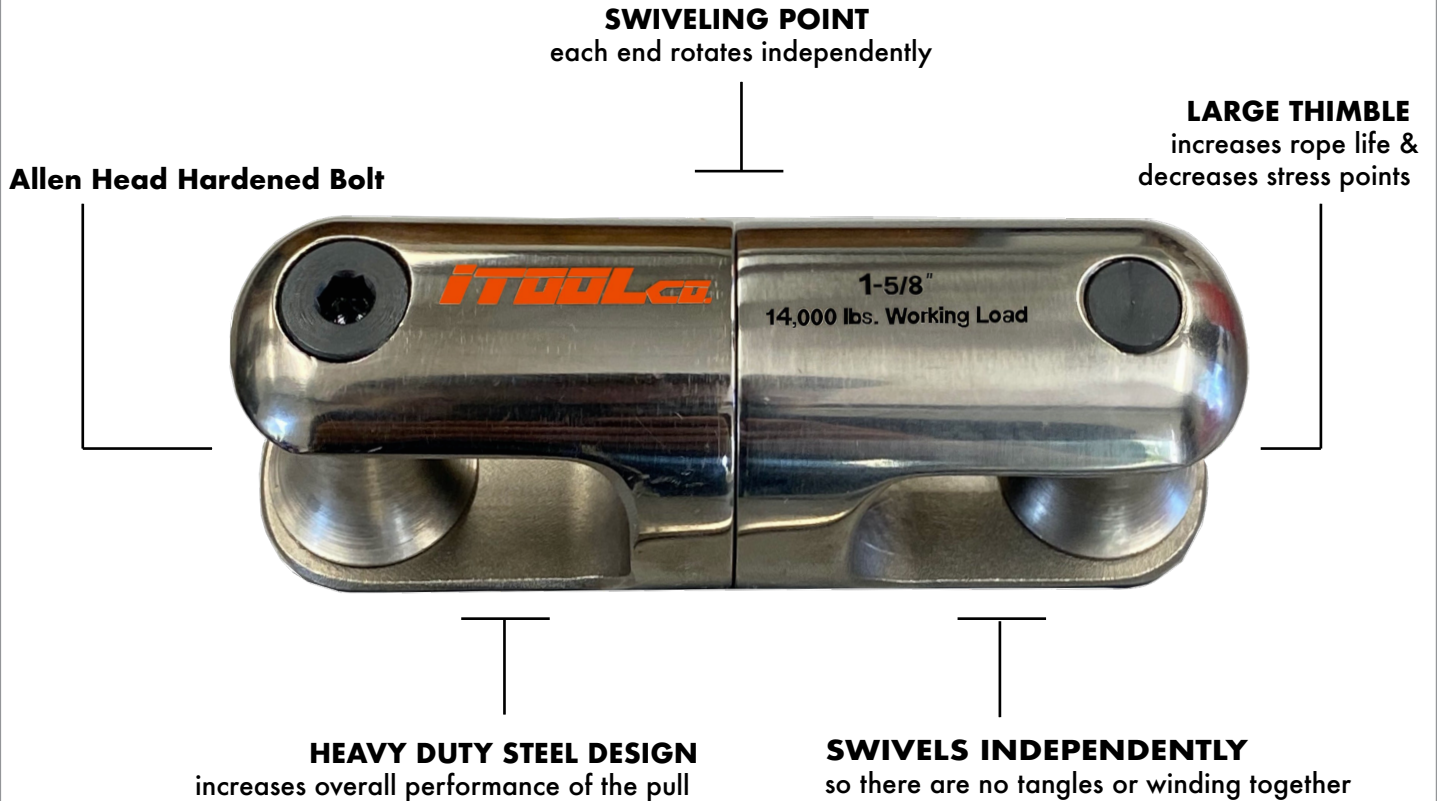

Model	Description	Specifications
SW-114	1-1/4" Pulling Swivel	3-3/4"L x 3/4"H x 1-1/4"W 1 lb. (6,000 lb. Load Capacity)
SW-158	1-5/8" Pulling Swivel	5-1/4"L x 7/8"H x 1-5/8"W 2 lb. (10,000 lb. Load Capacity)
SW-200	2" Pulling Swivel	6-1/2"L x 1-1/8"H x 2"W 3 lb. (20,000 lb. Load Capacity)

*** Not Intended For Crain Use or Lifting Loads**
use only for wirepulling

UPC# 617209996333
UPC# 617209997088
UPC# 650270084196

6
YEAR
LIMITED
WARRANTY

Patent Pending